

## Panels raised and fielded Compact laminate

<b>Construction:</b>	4 mm Compact laminate	( Appr. 1350 kg/m <sup>3</sup> - heat conductivity: 0,25 W/mK )
	Insulation - Polystyrene	( Appr. 33 kg/m <sup>3</sup> - heat conductivity: 0,034 W/mK )
	4 mm Compact laminate	( Appr.1350 kg/m <sup>3</sup> - heat conductivity: 0,25 W/mK )

**U-Value:**

U-Value - W/m <sup>2</sup> K								
24 mm	32 mm	41 mm						
1,31	1,00	0,79						

Measure specified as rebate measure  
 Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

**Weight:**


Weight appr. Kg./m <sup>2</sup>								
24 mm	32 mm	41 mm						
11,4	11,7	12,0						

Measure specified as rebate measure

**Measure:** Min.: 120 x 250 mm - Max.: 1200 x 2400 mm

**Tolerances:** Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

**Section drawing:**

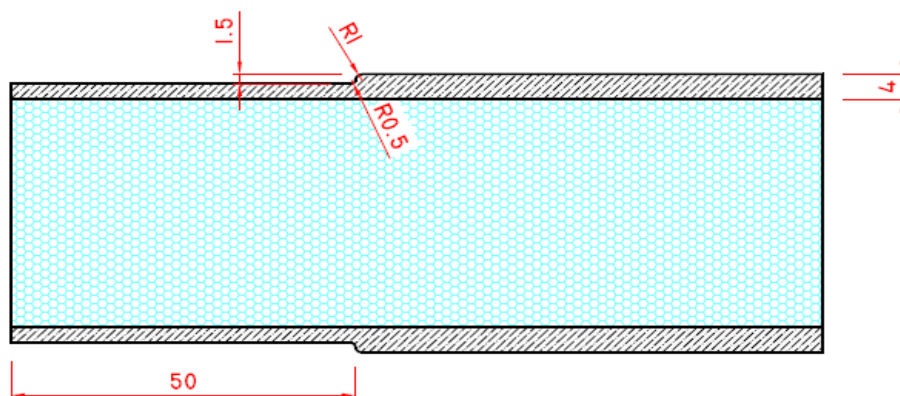

Made: 17.03.14	Data sheet: PMN	Draw.: HMN
Revised: 18.11.15	Data sheet: PMN	Draw.: