

Panels raised and fielded - 12 mm Tricoya

Construction: 12 mm Medite Tricoya (Appr. 720 kg/m³ - heat conductivity: 0,13 W/mK)
 Meets the standards of "Symbol H" - cf. DS/EN 316 and DS/EN 622-5 concerning MDF sheets

Insulation - Polystyrene (Appr. 33 kg/m³ - heat conductivity: 0,034 W/mK)

12 mm Medite Tricoya (Appr.720 kg/m³ - heat conductivity: 0,13 W/mK)
 Meets the standards of "Symbol H" - cf. DS/EN 316 and DS/EN 622-5 concerning MDF sheets

U-Value:

U-Value - W/m ² K									
28 mm	52 mm								
1,07	0,61								

Measure specified as rebate measure.
 Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

Weight:

Weight appr. Kg./m ²									
28 mm	52 mm								
17,4	18,2								


Measure specified as rebate measure.

Measure: Min.: 150 x 250 mm - Max.: 1200 x 2400 mm


Tolerances: Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

Section drawing:

Profile type 11

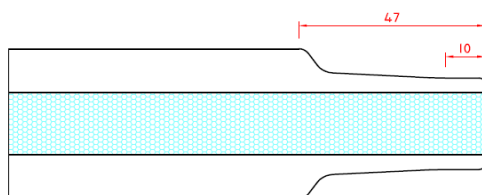

Profile type 12

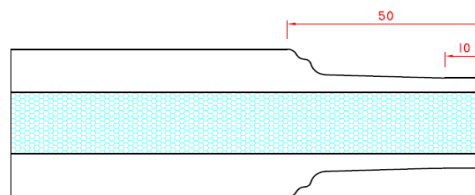

Made: 25.09.14	Data sheet: PMN	Draw.: HMN
Revised:	Data sheet:	Draw.:

O.H.Industri A/S
 Smedevej 17
 DK - 7430 Ikast
 +45 9725 1200
www.ohindustri.com