

Panels raised and fielded - 15 mm MDF

Construction:	15 mm MDF	(Appr. 720 kg/m ³ - heat conductivity: 0,13 W/mK)
	Meets the standards of "Symbol H" - cf. DS/EN 316 and DS/EN 622-5 concerning MDF sheets	
	Insulation - Polystyrene	(Appr. 33 kg/m ³ - heat conductivity: 0,034 W/mK)
	15 mm MDF	(Appr. 720 kg/m ³ - heat conductivity: 0,13 W/mK)
	Meets the standards of "Symbol H" - cf. DS/EN 316 and DS/EN 622-5 concerning MDF sheets	

U-Value:

	U-Value - W/m ² K									
Total thickness (mm)	40	45	51	54	60	62	69			
Rebate Thickness (mm)	20-23	24-28	28-32	32-36	40	41	48-52			
U-Value	1,45	1,19	0,99	0,91	0,78	0,75	0,65			

Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.


Weight:

	Weight appr. Kg./m ²									
Total thickness (mm)	40	45	51	54	60	62	69			
Rebate Thickness (mm)	20-23	24-28	28-32	32-36	40	41	48-52			
Weight	21,9	22,1	22,3	22,4	22,6	22,7	22,9			

Measure: Min.: 150 x 250 mm - Max.: 1200 x 2400 mm

Tolerances: Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

Section drawing:

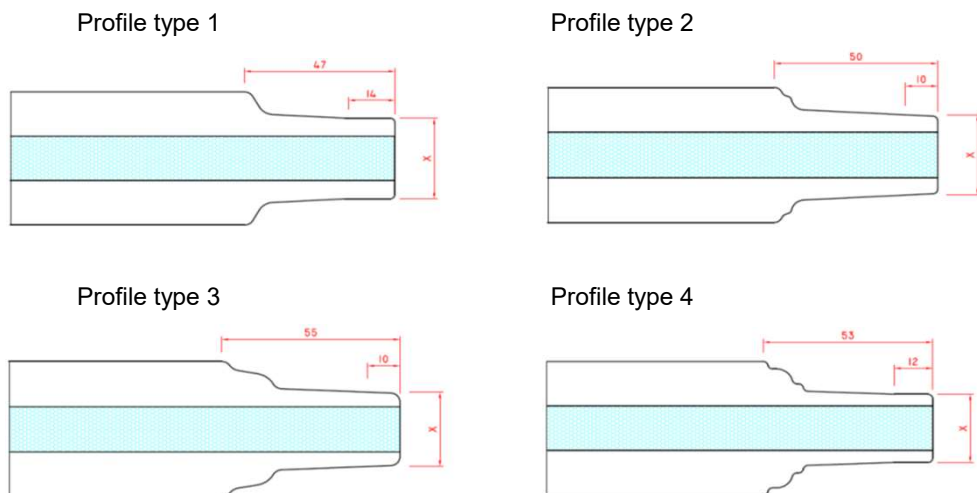

O.H.Industri A/S
Smedevej 17
DK - 7430 Ikast
+45 9725 1200
www.ohindustri.com

Made: 14.06.2016	Data sheet: CRS	Draw.: HMN
Revised:	Data sheet:	Draw.: