

## Panels Compact laminate/Compact laminate

<b>Construction:</b>	4 mm Compact laminate	( Appr. 1300 kg/m <sup>3</sup> - heat conductivity: 0,25 W/mK )
	Insulation - Polystyrene	( Appr. 33 kg/m <sup>3</sup> - heat conductivity: 0,034 W/mK )
	4 mm Compact laminate	( Appr.1300 kg/m <sup>3</sup> - heat conductivity: 0,25 W/mK )

**U-Value:**

U-Value - W/m <sup>2</sup> K								
23 mm	28 mm	38 mm	41 mm	43 mm	45 mm	48 mm	54 mm	
1,55	1,27	0,92	0,85	0,81	0,78	0,73	0,64	

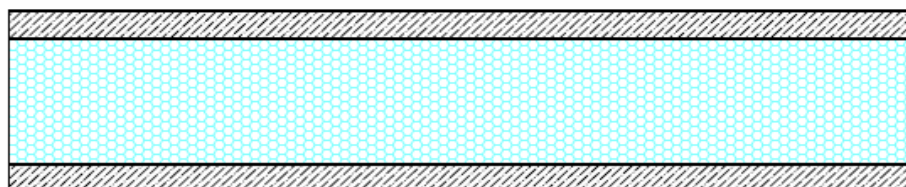
Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

**Weight:**

Weight appr. Kg./m <sup>2</sup>								
23 mm	28 mm	38 mm	41 mm	43 mm	45 mm	48 mm	54 mm	
11,0	11,2	11,5	11,7	11,7	11,8	11,9	12,2	

**Measure:** Min.: 120 x 250 mm - Max.: 1200 x 2400 mm

**Tolerances:** Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

**Section drawing:**


Made: 17.03.14	Data sheet: PMN	Draw.: HMN
Revised:	Data sheet:	Draw.:

O.H.Industri A/S  
Smedevej 17  
DK - 7430 Ikast  
+45 9725 1200  
[www.ohindustri.com](http://www.ohindustri.com)